

The IK1512 camera is a highly sensitive infrared camera (SWIR, NIR). The sensitivity interval reaches from 900 nm to 1700 nm. A sophisticated, thermal optimized housing allows sensor operation without active cooling. The optional available M42 to C-mount adapter or F-mount to C-mount adapter extends the number of lenses which can be used with this camera. Via standard USB2.0 interface can be controlled by each PC or notebook. The 14-bit A/D converter provides high dynamics of captured image data. Correction procedures specially adapted to properties of InGaAs sensors assure very high image quality.

### Sensor Properties


- 3/4" InGaAs matrix sensor
- 320 × 256 pixel
- 30 µm × 30 µm pixel size
- percentage of good pixels > 99,5 %
- quantum efficiency > 70 %
- progressive scan
- global shutter



### Application Examples

- laser beam profiling
- NIR (SWIR) – image processing
- spatially resolved NIR spectroscopy
- imaging improvement, (undercover) surveillance
- quality insurance in semiconductor industry, e.g. solar cell inspection
- scientific applications (medicine [e.g. OCT], biology, astronomy)
- material analysis (plastics, textiles, glass, metal, wood)
- industrial thermal image processing for temperatures > 200°C
- process surveillance
- 2D humidity analysis, water detection
- biometry (artificial hair appears black and natural hair white)
- analysis of paintings (art history, falsification detection)
- Hyperspectral imaging

### Spectral Sensor Sensitivity

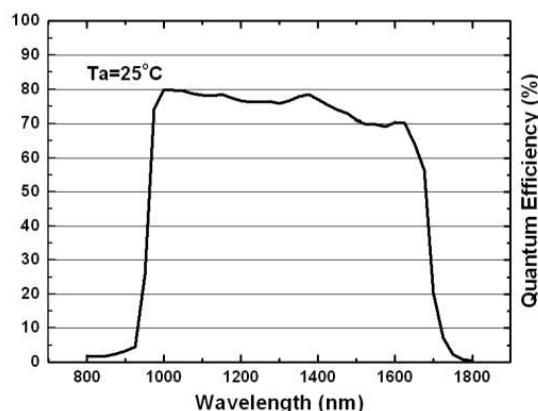


## Technical Specifications

|                                 |  |
|---------------------------------|--|
| Sensor                          | $\frac{3}{4}$ ", InGaAs matrix sensor, progressiv scan           |
| Resolution                      | 320 (H) $\times$ 256 (V)*  |
| Pixel size                      | 30 $\mu\text{m}$ $\times$ 30 $\mu\text{m}$                       |
| Spectral range                  | 0.9 $\mu\text{m}$ to 1.7 $\mu\text{m}$                           |
| Active Sensor size              | 9.6 mm (H) $\times$ 7.68 mm (V)                                  |
| A/D resolution                  | 14 bit   |
| Frame rate                      | 110 fps  |
| Exposure time                   | 35 $\mu\text{s}$ to 1 s  |
| Gain                            | Two modes (low gain and high gain)                               |
| Digital interface               | USB2.0 (HighSpeed)   |
| Trigger                         | opto-decoupled   |
| Power supply                    | 12-24 V (DC)   |
| Power loss                      | typ. 2.1 W   |
| Temperature range (operational) | 0 °C - + 55 °C   |
| Temperature range (storage)     | - 40 °C - + 85 °C  |
| Housing                         | anodized aluminum with integrated cooling fins                   |
| Dimensions without lens         | 91 mm $\times$ 91 mm $\times$ 86 mm                              |
| Weight (without lens)           | approx. 850 g  |
| Lens mount                      | M42 or C-Mount; adjustable<br>(optional F-Mount (Nikon) Adapter) |
| Filter thread                   | M35.5 in front of the sensor                                     |

\*Sensor specifications are valid inside a centered 318  $\times$  254 pixel window.

**Frontal View**

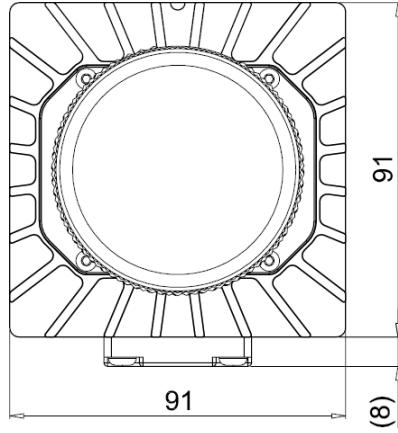

**Lateral View**

